

CNtoU TP16'(4.8 METER) ANTENNA MAST, **ANTENNA POLE, TELESCOPIC**


<https://chelegance.com/products/cntou-chelegance-tp16%E2%80%B2-4.8-meter-antenna-mast-for-mc-599-jpc-7-antenna-pole-telescopic/>



1-1. DESCRIPTION & SPECIFICATION

The TP16 ANTENNA MAST is perfect for mounting MC-599 and JPC-7 antennas, as well as other portable operation antennas for activities like EMCOMM, POTA, and SOTA. It can extend up to 4.8 meters/15.75 feet and hold maximum weight is 8.9 kg/19 lbs. When collapsed, the TP16 is just 142 cm/4.66 ft, making it highly portable.

The legs spread at the maximum distance, the TP16 base covers 787 square inches for a more stable support. This makes it a great choice for field work, outdoor events, and other situations where you need a sturdy support for your antenna.

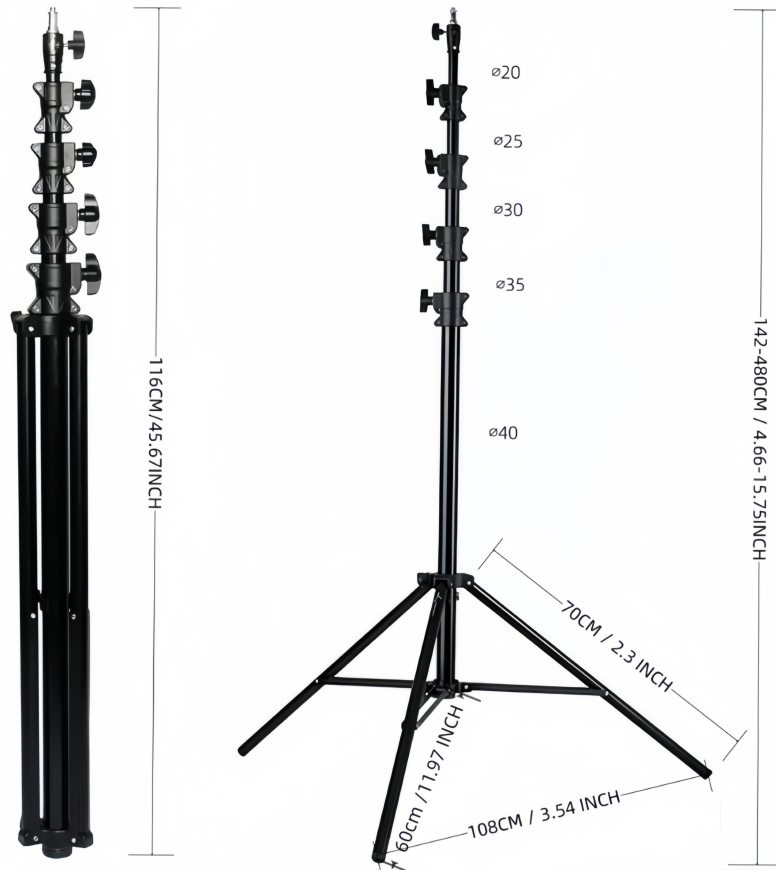

PS: Dimensions when the bottom legs are fully extended.

1-2. PART LIST

- 1 X TRIPOD

1-3. INSTALLATION GUIDE

1. First loosen the leg thumbscrew. Slightly separate the legs to the desired spread and tighten the leg thumbscrew.



2. install your antenna onto the mount or install your antenna onto the top of the mast with thumbscrew.



3. Loosen the thumbscrew and extend each section to the desired height. Re-clamp each section and verify that it is secure and will not allow the tube to slide down.



Tips:

1. Make sure as each section is raised that the stand is stable. If the mast begins to lean to one side stop and verify that the antenna is balanced properly on the mount. If an antenna is too heavy, it may need to be lowered to the next section down.
2. If the antenna feels unstable when raised, use **guy ropes** to secure it.
3. The TP16 clamps come loaded, no need to install them yourself.

1-4. RECOMMENDATIONS ON ACCESSORIES

[JNCRADIO MC-599 SHORTWAVE DIPOLE ANTENNA](#)

[JPC-7 DP PORTABLE SHORTWAVE ANTENNA](#)

[CNtoU ACC FOR MC-599 SHORTWAVE DIPOLE ANTENNA](#)

Reach out to us if you have any problems: support@chelegance.com

HAVE FUN WITH TRIPOD FOR MC-599 AND JPC-7, 73!